



The Washer Players Community!

SUPPLIES:

- 2' x 4' sheet of plywood
- 3, 8 ft. 2x4's
- 1-1/2" Wood Screws
- Outdoor carpet or turf
- Staple gun
- Construction adhesive

TOOLS:

- Tape Measure
- 4' straight edge or framing square
- Saw: table, handsaw, or circular.
- For holes: Hole saw, rotozip, or Jig Saw
- Drill



Cutting the Wood:

Board tops:

Cut the 2' x 4' sheet into 2 long pieces 12" wide.

Side Rails:

Cut the 2x4's to create your side rails.

- 2 – 45" pieces (outer rails)
- 2 – 12" pieces
- 2 – 8.5" pieces (inner rails)
- 2 – 41.5" pieces

Notes:

- Cut the longest lengths first, to ensure that you use your wood properly.
- If you lay the cut pieces together as you go, you'll be able to see whether the inner rails need to be shorter or narrower to fit.



Cutting the holes:

This step may be also be done after the top platforms are attached to the rails.

Measure to find the middle of your board.
Draw a line down the center.


Next, measure down the center line to mark where the hole centers will be.

- 1st hole: 8" from the back end
- 2nd hole: 16" from back end
- 3rd hole: 24" from back end

Using the cutting device of your choice, remove three 4" holes at the points you've marked.

Notes:

- Using 8" spacing will leave 4 inches between each 4" hole.
- 4" hold saw is shown, and recommended

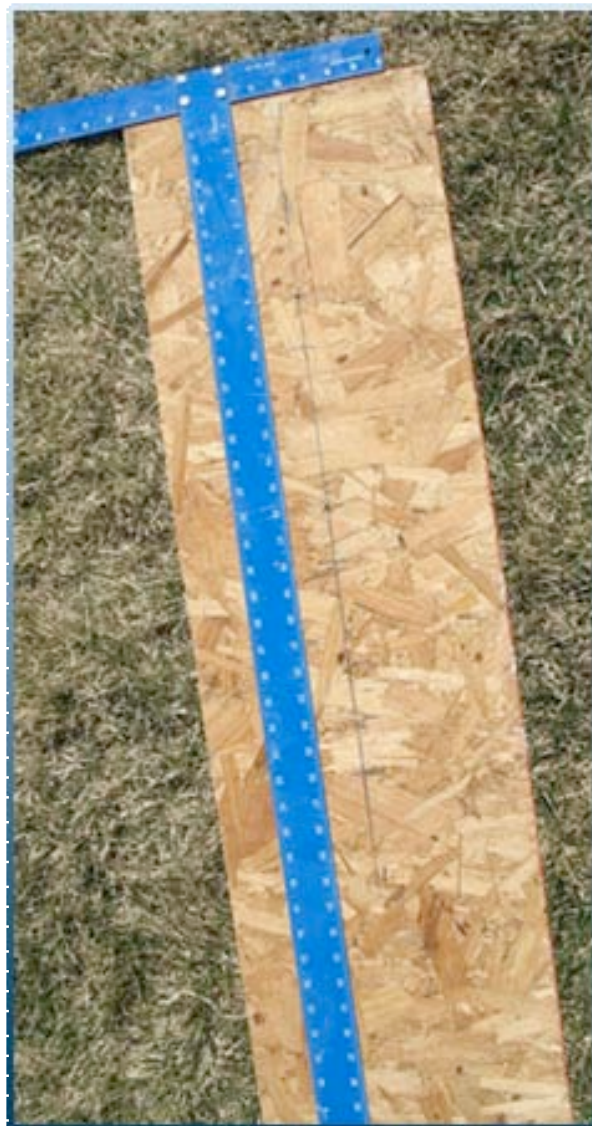

Assembling the Boards

First, screw the outer rails together. Attach the shorter pieces to the outer ends, so that the frame will be 12" wide by 48" long.

Second, assemble the nested rails. The shorter pieces will again be on the ends.

Next attach the top platforms to the rails. Starting with the outer rails, screw from the top, down into the 2x4's.

Notes:

- Check as you assemble that the nested rails will fit inside of the outer rails.
- Nesting the inner rails before attaching their top platform will help to ensure that it will be flush with the outer rails when you are finished.



Carpeting the Boards

Measure out a section of your carpet that will overlap the top edges of your platforms.

Apply adhesive to top of platform and lay cut section of carpet onto the board.

Press to remove bubbles and create a tight seal.

Wrap the carpet over the edges and staple the carpet onto the boards. (stapling gives double assurance that the carpet will stay attached)

Cut the three holes.

Here you have two options.


1. Cut a round hole in the carpet
2. Cut a star pattern and wrap the carpet under.



Finish the boards

Do a quick check to make sure that your boards will fit together, that everything is solid, and that the carpet is firmly attached to the boards.

You're done! Now play Washers!

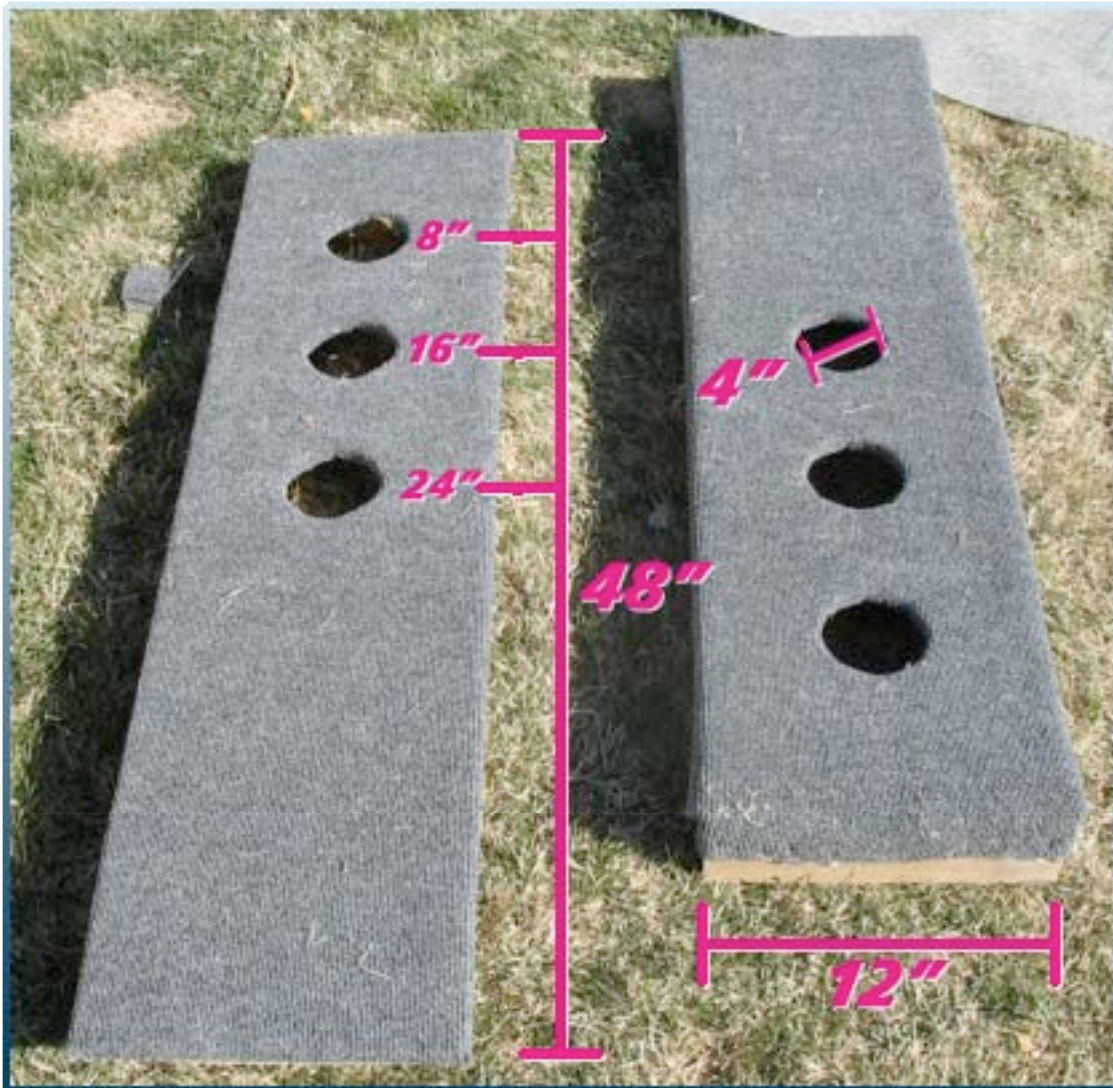

Instructions provided by www.WasherPlayers.net

